



De-watering and compacting PET bottles

Compacting and de-watering PET bottles at a ratio of app. 8 : 1.
 Maximum size: 500 ml.




SK240

- Ensure 100% product destruction so no one is carrying off product for re-sale or consumption
- Save space and handling by compacting the PET bottles early in the process
- Save costs on number of hauls when selling this valuable recyclable material



Production Data	Europe	USA
Capacity per hour	App. 3000 0,5 l bottles	App. 3000 18 oz bottles
Density achieved	App. 225 kg/m ³	App. 13 lbs/ft ³
Energy consumption	Europe	USA
Main motor	5,5 kW	8.8 HP (6.6 kW)
Hydraulic pump	0,55 kW	0.88 HP (0.66 kW)
Electrical requirements	Europe	USA
3 phase 400V; 50 Hz	32 AMPS	
3 phase 480V; 60 Hz		40 AMPS
3 phase 230V; 60 Hz		40 AMPS
Dimensions : 09-50114	Europe	USA
Length	4,6 m	15 ft. 1 inch
Width	1,30 m	4 ft. 3 inch
Height	1,75 m	5 ft. 7 inch
Weight	App. 1000 kg	App. 2200 lbs

09-50115
 SK240 for compacting post –
 consumer (almost empty) bottles

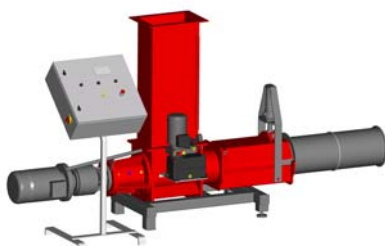

09-50114
 SK240 for de-watering and compacting
 full PET bottles

