



# Compacting PUR

Compacting expanded polyurethane at a ratio of up to app. 50 : 1.


## SK370

- Save space and handling by compacting the PUR waste in a fast and efficient manner
- Avoid dust issues as the compacted cylinders are packed neatly in a bag
- Save number of waste hauls by compacting the PUR immediately



Production Data	Europe	USA
Capacity per hour	App. 200 kg	App. 440 lbs
Density achieved	App. 350 kg/m <sup>3</sup>	App. 22 lbs/ft <sup>3</sup>
Cylinder measurement	App. 38 cm	App. 14.5"
Energy consumption	Europe	USA
Main motor	15 kW	24 HP (18 kW)
Hydraulic pump	0,55 kW	0.88 HP (0.66 kW)
Pre-crusher HEAVY DUTY	5,5 kW	8.8 HP (6.6 kW)
Electrical requirements	Europe	USA
3 phase 400V; 50 Hz (HEAVY DUTY)	63 AMPS	
3 phase 480V; 60 Hz (HEAVY DUTY)		63 AMPS
3 phase 230V; 60 Hz (HEAVY DUTY)		125 AMPS
Dimensions	Europe	USA
Length	4,50 m	14 ft 9 inch
Width	0,50 m	1 ft 7 inch
Height	1,20 m	3 ft 11 inch
Weight	App. 1500 kg	App. 3300 lbs

09-2082  
SK370 with bag holder for placing under silo.

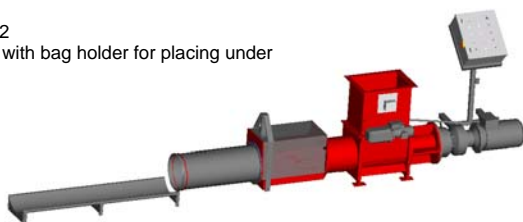

09-50777  
SK370 for manual feed with 45 degree HEAVY DUTY precrusher and bag holder + bagtrough

